
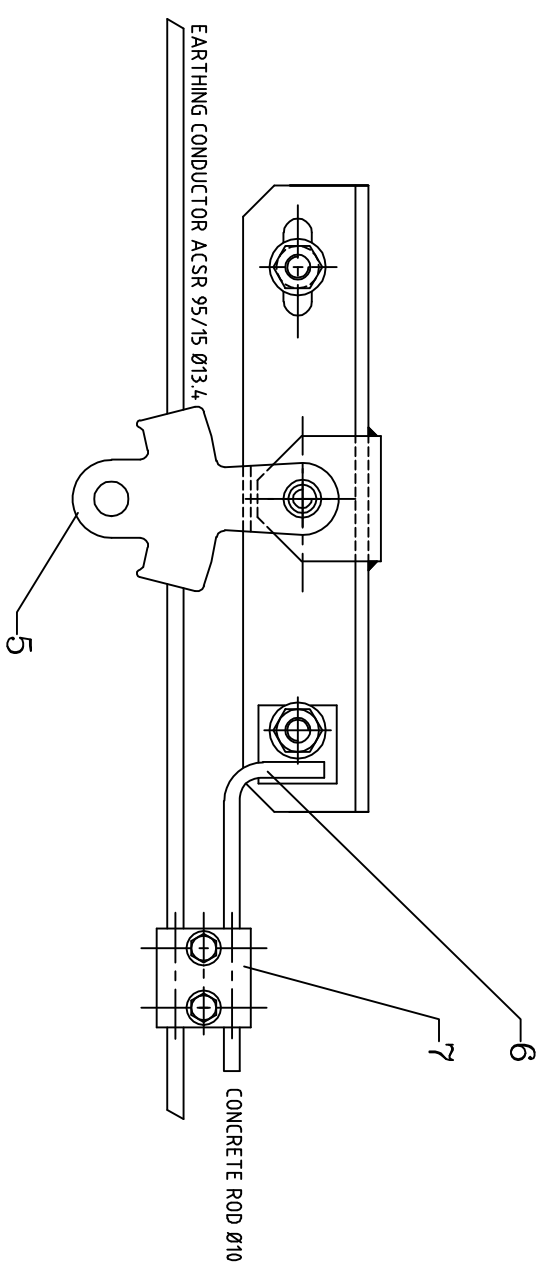
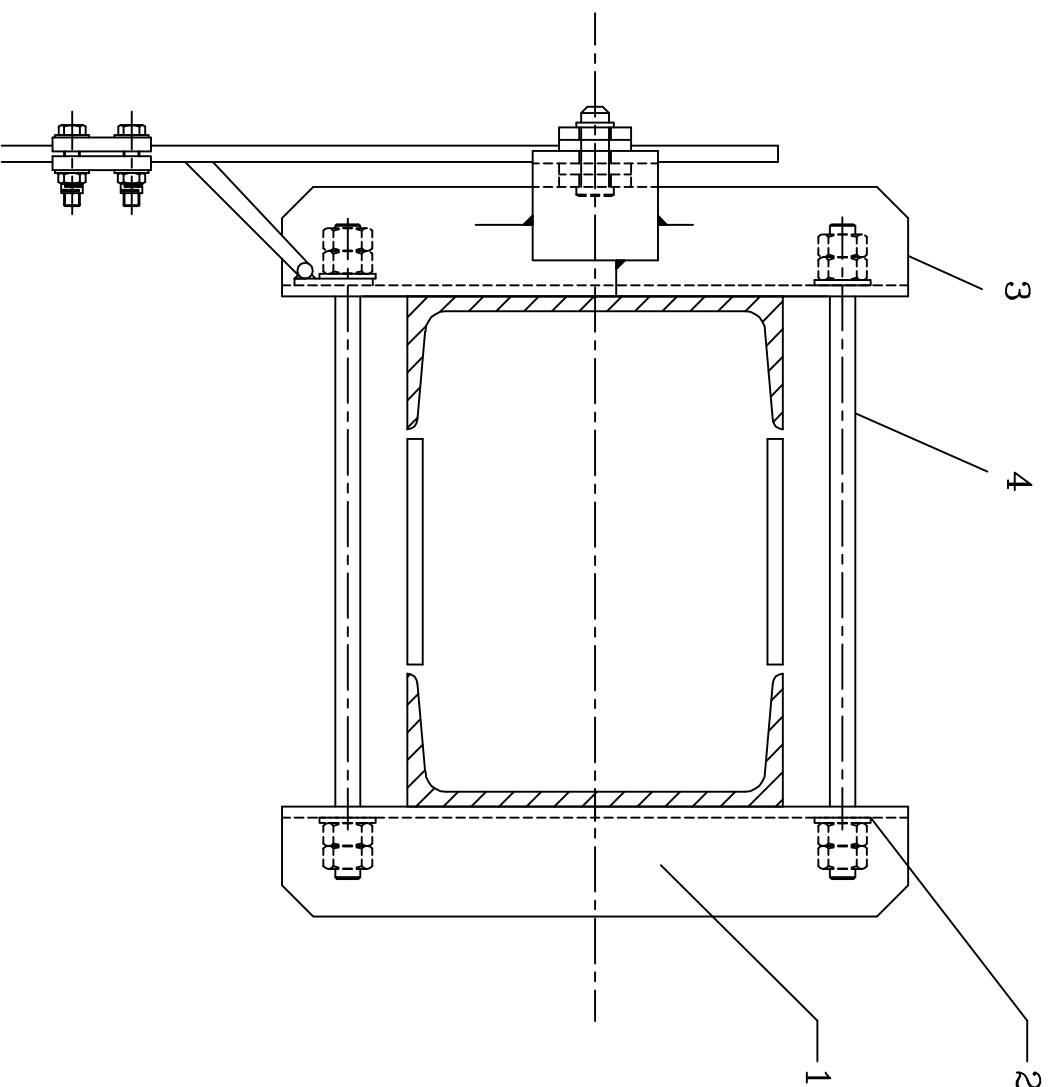


CONTINUOUS BEAD WATERPROOF WELDS MINIMUM THICKNESS: 4mm
BETWEEN SQUARE WASHER AND CONCRETE ROD

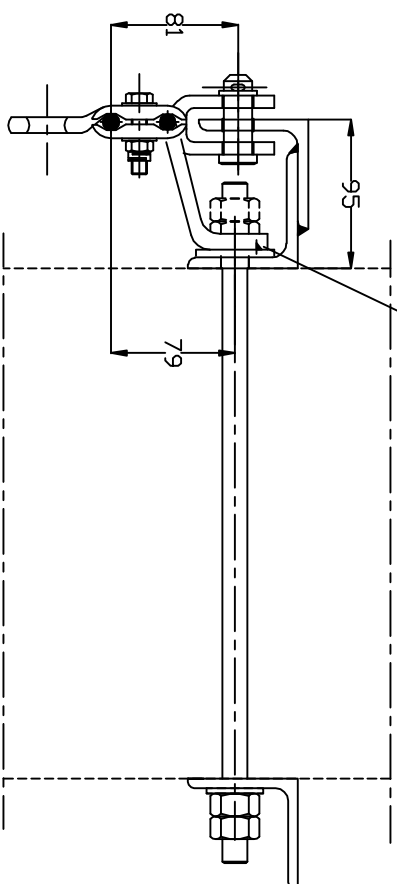

1	7	CLAMP	0.59	ELC 2-4.0	
1	6	EARTHING CONNECTION	0.25	03LC00BDG260	101
1	5	EARTHING CONDUCTOR SUSPENSION TYPE I	1.30	ELC 13-14.0	
2	4	THREADED ROD M16- 500/100		03LC00BDG141	1611F2
1	3	COUNTERPLATE WITH EARTHING CONDUCTOR		03LC00BDG102	102
4	2	WASHER M16N		03LC00BDG142	161110
1	1	COUNTERPLATE		03LC00BDG090	102
QUANTITY	ITEM	DESIGNATION	UNIT MASS kg	REFERENCE DRAWING	MARK

[illegible]